




TSC115/130C-PUR Communication cable

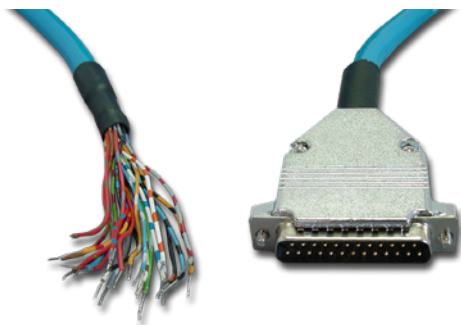

Scope of delivery:

TSC115C-PUR 15 m

TSC130C-PUR 30 m

Part# 814011

Part# 813776

TSC115/130C-PUR

Dimensions	15 m or 30 m
Temperature range	Operation fixed installed: -20 bis 70 °C Operation flexibel: -5 bis 70 °C
Sheathing	PUR (Polyurethan)
Cable	Shielded cable, 25-core
Plug	25-pin SUB-D connector
Cable cross-section	0,25 mm ²

All warnings and other important, detailed information must be obtained from the operating manual.
This document is not subject to an automatic revision service.